


## MINI | CLIMATE

### Ventilation Units



MINI & CLIMATE are thermal energy (heat) recovery ventilators that can provide spaces with fresh and filtered air without opening the windows, which is quite important during cold or warm periods of the year. Notably, the two units are 3-IN-1 devices that provide air purification, ventilation, and comfort.

Although the units share the same "plug and play" form factor, MINI uses a shell and tube exchanger whereas the newer CLIMATE product utilizes a double pipe exchanger.

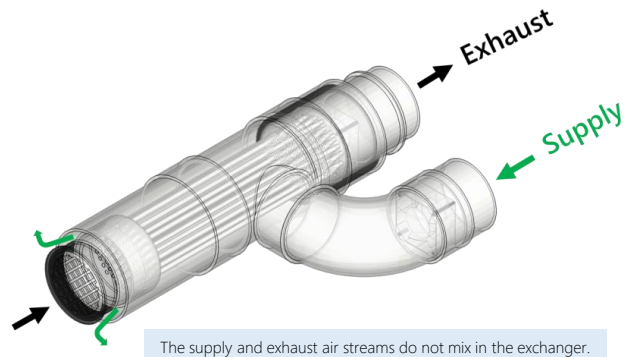

### PURIFICATION | Clean Air

The units use the principle of mechanical filtration to remove pollutants from the outdoor air that is supplied to your space.

### VENTILATION | Fresh Air

The units exhaust stale air and pollutants from your space while simultaneously supplying fresh and filtered air from the outdoors. The units are calibrated for balanced ventilation by default, and can also be configured as negative or positive pressure devices.

### COMFORT | Conditioned Air

The units have been developed to utilize air-to-air exchangers that can passively condition the indoor air that is supplied to your space throughout the year thereby reducing your energy bills.

## SPECIFICATIONS

Parameter	MINI	CLIMATE
Air volume flow rate [m <sup>3</sup> /h]	35	50
Power consumption [W]	4.0	1.6
Ports	4	2
Sound level [dB]	Not applicable	23
Location	Remote & Spot	Spot
Maximum voltage [V DC]	12	
Duct diameter [in (mm)]	3 (76.2)	
Weight [lb (kg)]	11.0±2.2 (5±1)	

See details on our website.

**Note.** Due to continuous research and development and the diversity of suppliers that are utilized by the manufacturer, the specifications, drawings, and images of the product may vary between the technical data sheet and/or the actual units that are received by customers. We reserve the right to modify the data sheet without notice.

MODEL	QUANTITY	COMMENTS	PROJECT
			Location: Architect: Engineer: Contractor: Submitted By:

## APPLICATIONS

- Can be permanently installed or used as a portable unit;
- Suitable for both new construction and retrofit projects;
- Suitable for: bedroom; living room; recreation room; office; studio; garage; shop; apartment; tiny house; small house.

## INSTALLATION

The units are easily self installed, and can be sited in multiple places such as a table / floor or mounted on a wall / ceiling.

**Window/Door.** The ducts shall be inserted into two holes that are drilled into a board. A fabric casement seal with two zipper orifices may be used in lieu of a board to avoid drilling.

**Wall/Ceiling.** The ducts shall be inserted into two holes that are drilled through the wall or ceiling that can support the weight.

## CONTROL

**Inbuilt.** Switches and controllers can be used to independently set the normal and boost modes for the supply and exhaust sides.

**External.** The units have ports for boost control through the use of external switches, smart plugs & CO<sub>2</sub> / humidity controllers.

## MAINTENANCE

It is recommended to change the filters at least once in three months depending on the outdoor air conditions.

## DRAWING

